


Ruggedized and Weatherproof SDR Platforms



RE320

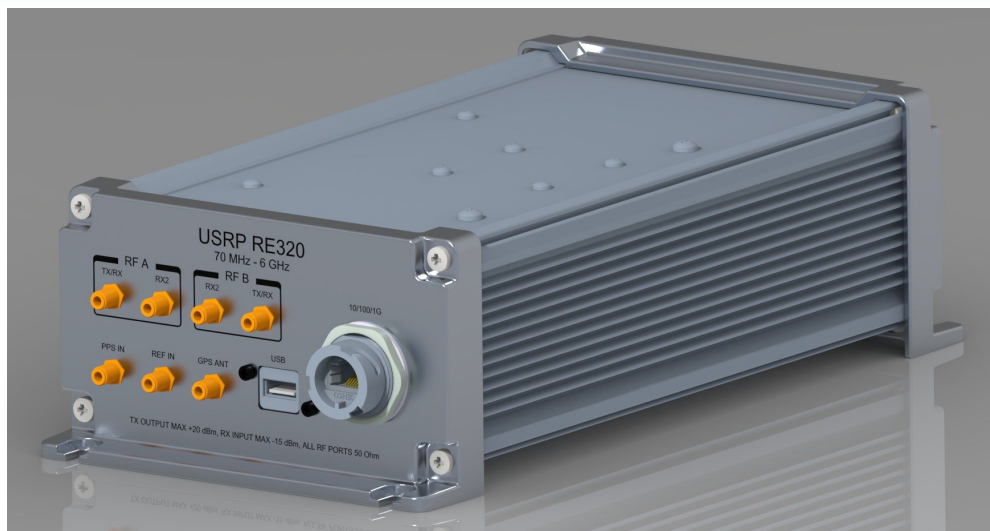

Preliminary

KEY FEATURES

- Ruggedized version of NI (Ettus Research brand) E320 Series Software Defined Radio
- Conduction-cooled construction optionally designed to meet MIL 810 for shock/vibration and MIL 461 for EMI
- IP67 weatherproof sealed unit
- Other similar NI small form factor SDR versions are available upon request
- Customizable I/O options
- Anti-vandal pushbutton on/off switch
- Pole-mount and other mounting options available
- Contact Pixus for ruggedization options for other NI SDRs

The Pixus Technologies RE320 is a ruggedized version of National Instruments (Ettus Research brand) E320 Software Defined Radio. Working with NI, Pixus redesigned the commercial version of the product to create a hardened, sealed, conduction-cooled unit to meet IP67 specifications. There are options to further ruggedize the unit to MIL 810 for shock/vibration and MIL 461 for EMI.

The RE320 series can be used in various types of airborne, shipboard, soldier mount, ground vehicle, or outdoor designs. Example applications include SIG-INT, passive RADAR, Drone Deterrence/Spoofing and prototyping systems for advanced wireless (WiFi/Cell/MIMO).

Contact Pixus for ruggedization inquiries for other SDRs from NI. Visit www.ettus.com for SDR specifications.

Ruggedized and Weatherproof SDR Platforms

I/O Configurations & Power

Pixus offers a standard I/O configuration for the IP67 RE320 (see below) and other SDRs. The modular front and rear faceplates are also customizable. Consult Pixus to discuss your specific requirement. The RE320 comes with a loose connector that can be terminated by the user to the application's power source (via crimp or solder). Please note that the MIL rugged version requires modification to the I/O details below. The unit standardly runs on 12VDC power (other power may be available upon request). For versions that require an internal heater for low-temp applications, the power will utilize 24VDC or 48VDC.



Front I/O



Rear I/O

Terms of Use*

The Customer agrees that the Products will not be re-exported, resold, or transferred to:

- (a) any country subject to export restrictions under the Export Administration Act of 1979 (EAR).
 - (b) any end-user who has been denied participation in export transactions by any federal agency of the United States government.
 - (c) an end-user who the Customer knows or has reason to believe will utilize the Products directly or indirectly in nuclear activities listed in the EAR 778.3(b)(1), (2) & (3), whether the items are specifically designed or modified for such activities.
 - (d) an end-use destined for the design, development, production, or use of missiles or missile projects, or activities related to nuclear, chemical, or biological weapons.
- The Customer acknowledges that "Products" include technical data subject to the export and re-export restrictions of the EAR.

* Pixus' other standard terms and conditions apply.

Ruggedized and Weatherproof SDR Platforms

Ruggedization Levels

The RE320 was initially designed to meet IP67 waterproof specifications in a rugged, conduction-cooled design. The unit standardly meets -20C to 71C temperature ranges.

To meet MIL specifications for shock/vibration, there are modifications required to utilize 38999 connectors and internal bracing. Pixus also offers a light-rugged solution providing -20C to +71C temperature range and transport grade shock/vibration levels in an air-cooled configuration.

The RE320 is a chassis platform for the end customer/integrator to incorporate their software, interface, and mounting options. As such, it is up to the integrator to provide end application testing to the applications' requirements. Pixus will guarantee that we will meet agreed upon ruggedization levels. The numbers below are what the units are designed to meet. Contact Pixus for more details or to discuss co-testing options.

	Air cooled	Conduction cooled	Shock/vibration	IP67	Environmental/EMI
Light-rugged	Temp: - 20C to 71C	N/A	Transport grade	N/A	Not sealed. Various EMI level options.
Rugged IP67, not MIL-grade	Custom only	-10C to 50C, With heater: - 40C to 71C	~ 15G shock, above Transport grade	Yes	Fully sealed, MIL461 EMI
MIL Spec Rugged	Custom only	-10C to 50C, With heater: -40C to 71C	~ 20-25G shock, meet various MIL810 specs	Yes	Fully sealed, MIL461 EMI

Specification Notes

Dimensions of the MIL version are TBD. The weight of the IP67 version is ~7 lbs.

Interface Connectors

Pixus provides the mating connectors to the external I/O interfaces except for the fiber connector. Contact Pixus to discuss what mating fiber connector options are available by 3rd parties.

In all versions except the Semi-rugged air cooled configuration, Pixus uses interface cables/connectors from NI's unit to the front and rear I/O panels. Pixus uses components that are expected to match the end performance of the NI SDR, however, some degree of loss may arise as a result of these interfaces. Contact Pixus for cable rating details.

Ruggedized and Weatherproof SDR Platforms

ORDERING OPTIONS

RE320-ABC-DEF-XX

A = Type

0 = Standard RE320 type
1 = Other

B = I/O Configuration

0 = Standard I/O
1 = Other
2 = Reserved

C = Ruggedization Level

0 = IP67, Rugged (standard)
1 = Reserved
2 = Reserved
3 = MIL 810/410 Rugged, IP67
4 = Other

D = Light Indicator Setting

0 = Light indicators connected, lit
1 = Light indicators not connected, dark

E = Ethernet Interface

0 = Copper
1 = Fiber
2 = Other

F = Heater Installation

0 (or blank) = no heater installed, 12V power
1 = Heater installed for low-temp apps, 24V power
2 = Other

2 digit customization code

Blank = standard, no customization

ACCESSORIES

Power Supply Kit P/N: SPS000X

The SPS000X comes with a C13 IEC inlet for AC input and an RB210 compatible connector for the DC output.

